

MyPBX U100 - IP-PBX for Your Business

All you need in one system

MyPBX U100 is a 1U rack mount model IP PBX for up to 100 users. Internally, it supports network access to ISDN BRI, PSTN, GSM/UMTS and VoIP. High performance, stability and compatibility, combined with rich functionality make MyPBX U100 perfectly suited for your business communication.



[Click to Enlarge](#)

MyPBX®

Specification

Users: 100

Concurrent Calls: 25

Voicemail: Default 3000min (upgradable)

Auto-Recording(Add-on): Support

Interface:

Up to 16 Analog Ports ([FXO/FXS](#))

Up to 8 [GSM](#) Ports (Quad-Band GSM/GPRS850/900/1800/1900MHz)

Up to 8 [UMTS](#) Ports (UMTS 900/2100MHz or 850/2100MHZ or 850/1900MHZ)

Up to 8 [BRI](#) Ports

One RS232 Port

LAN: 1 (10/100Mbps)

WAN: 1 (10/100Mbps)

USB: 1 (USB2.0)

Audio In/Out: Supported

Size: 340x210x44 mm

Weight: 2.1kg

Features

Attend Transfer

[Blind Transfer](#)

[BLF Support](#)

[Blacklist](#)

Callback

[CDR \(Call Detail Records\)](#)

[Call Forward](#)

[Call Parking](#)

[Call Recording](#)

[Call Pickup](#)

[Call Routing](#)

[Call Transfer](#)

[Call Waiting](#)

Caller ID

[Conference](#)

Define Office Time

DDNS

Dial by Name

Power Supply: AC 100-240V 50/60Hz 1.5A MAX

SIP Protocol: SIP(RFC3261), IAX2

Transport Protocol: UDP,TCP,TLS,SRTP

Codec: G.711, GSM, SPEEX, G.722, G.726, ADPCM, G.729 A, H261, H263, H263p, H264, MPEG4.

DTMF: Inband, RFC2833, SIP INFO

Echo Cancellation: Supported


LED: Red for FXO/GSM/UMTS, Orange for BRI, Green for FXS

Network: Static IP, PPPoE, DHCP, Firewall, VLAN, DDNS, QoS, DHCP Server, OpenVPN

Multiple Languages Support:

Chinese, Dutch, English, French, German, Hebrew, Korean, Italian, Polish,Portuguese, Romanian, Russian, Spanish, Thai, Turkish

Internal Construction

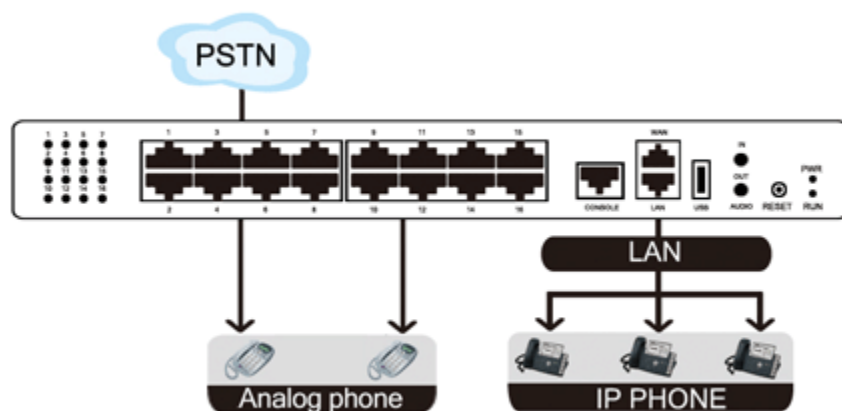

[DISA](#) (Direct Inward System Access)

[DIDs](#)

Distinctive Ringtone

[DND](#) (Do Not Disturb)

FAX (T.38)

Firewall

Follow Me

[IVR](#) (Interactive Voice

Response)

[Intercom/Zone Intercom](#)

Mobility Extension

Multi-language Prompt

Music On Hold

Music On Transfer

[MyTwins](#) (Double System)

[One touch record](#)

OpenVPN

Phone Provisioning

PIN User (PIN Code Control)

[Paging/Zone Paging](#)

[PPPoE](#)

[Queue](#)

[Redundancy](#)

[Ring Group](#)

Route by Caller ID

Skype Integration (Skype Connect)

SMS to Mail/Mail to SMS

Speed Dial

[Three Way Calling](#)

Voicemail

Voicemail to Email

Voicemail Forwarding

Web Based Control Panel

Spy functions (Normal Spy,

Whisper Spy, Barge Spy)